

SMART


- · AI+ technology enables you to do more with less
- · Smart Access allows you to choose how your energy is used - all at fingertips

SUSTAINABLE

- Reduces the burden on the earth's natural resources
- · Produces zero emissions
- Generates and stores energy from the sun

POWERFUL

- · Offers the most powerful whole home battery system on the market
- · Empowers you with energy independence
- · Enables you to have complete control of how you want to use your energy
- Live with the peace of mind that your home energy is backed up when the power is out

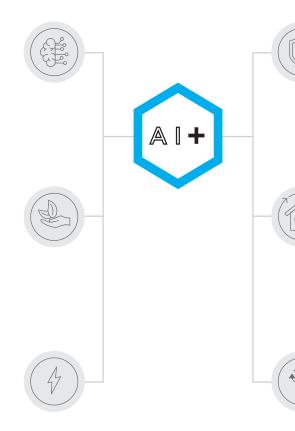

SAFE

- Lithium-Iron Phosphate (LFP)
- Rigorously tested, UL 1973 & UL 9540.
- ETL / Intertek listed, tested, and passed
- Securely power your home even when the grid power is out

ECONOMICAL

- Reduces power conversion losses
- Reduces materials and labor required for your ESS system
- · Increases the life of your investment with our AI+ technology system management and robust warranty

FLEXIBLE

- AC and DC coupling
- Solar and generator ready
- Stack 1-12 inverters
- Stack 1-14 batteries in parallel per inverter
- Unlimited expansion of Smart Access panels
- · Build a custom package with the AI+ Custom Whole Home solution
- · Add extra system components to any package initially or in the future





Storz Power AI+ packages boast flexible home energy options that can power just your essentials or your whole home, regardless of size, in the event of a power outage or emergency. The Storz Power lithium-iron phosphate (LFP) Battery and Inverter matched with the Smart Access Controller are what makes our AI+ packages the most flexible, safe, and powerful energy storage systems that exist today.

AI+ 30 A UP TO 30 AMPS This package offers fundamental security for small homes. Power things like your fridge, select lights, internet router, and fans. 1 Battery 5.12 kWh 1 5K Inverter 2.5-6.5kW PV



Al+ 50A UP TO 50 AMPS This is the perfect starter package to power your home essentials in case of an emergency. Power things like your fridge, microwave, lights throughout, garage door, internet router, and fans. 2 Batteries 10.24 kWh 1 12K Inverter 2.5-13kW PV

AI+ CUSTOM

AI+ 70A SMART ACCESS

UP TO 70 AMPS

Access more than just your basics and choose where to use your home's power in real-time. Power all the energy consuming items in the Al+ 50A package plus the water heater, EV charger, and well pump.

- 3 Batteries 15.36 kWh
- 1 12K Inverter 2.5-13 kW PV
- 1 Smart Access Controller






AI+ 200A SMART ACCESS

UP TO 200 AMPS

Access power to your entire 200 amp main panel and choose where to use your home's power in real-time. Power all the energy consuming items in the Al+ 70A Smart Access package plus the AC, computers, electric oven/range, and pool pump.

- 4 Batteries 20.48 kWh
- 1 12K Inverter 2.5-13 kW PV
- 1 Smart Access Controller
- 1 AI+ Smart Switch

ACCESS ALEXANDER ACCESS ALEXANDER ALEXAN

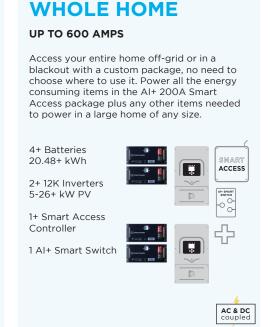





3 TYPES OF INSTALL CONFIGURATIONS

DC COUPLED CONFIGURATION

NEW SYSTEM

A DC coupled PV array is when strings of solar panels are directly connected to a battery inverter. When installing a new PV array, the AI+ Storz Power system can be your direct PV solution up to 13 kW DC. This reduces cost of additional AC coupled inverters as well as speeds up installation, reducing labor cost, and is able to meet all NEC17 Panel Level Shutdown requirements. This configuration is generator ready.

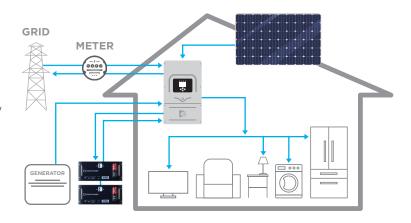

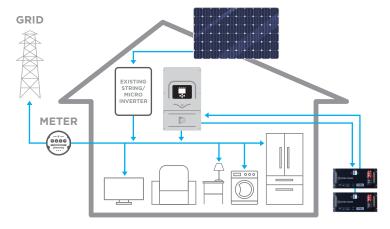

AC COUPLED CONFIGURATION

EXISTING SYSTEM


Keep the PV array active as well when the grid fails with Storz Power's energy storage system!

Your existing system could come with many different existing solar or micro inverters. With Storz Power, you can retrofit any system even if it is 10 years old. This not only gives you access to batteries in an outage but it also will give full access to the PV on the rooftop as well. Don't let your investment of string or micro inverters go to waste.

AC & DC COUPLED AT THE SAME TIME

NEW OR EXISTING SYSTEM

Even more performance than ever! If you have an existing PV array but need more power and want battery backup, no worries. AC couple the existing PV array and simply DC couple the added PV right into the Storz Power AI+ inverter. This reduces significant cost where the competitors would require multiple total systems.

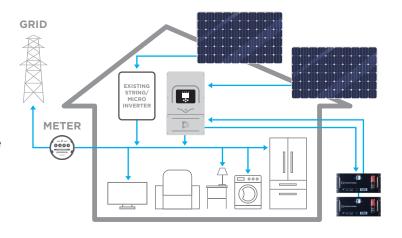



SPECIFICATIONS

*AI+ 30A & AI+ 30A Plus packages are not yet offered in CA

MODEL NUMBERS	AI+ 30A	AI+ 30A PLUS	AI+ 50A	AI+ 70A SMART ACCESS	AI+ 200A SMART ACCESS	AI+ CUSTOM WHOLE HOME		
AI+ Package Model Numbers	10241	10242	10243	10244	10245	10246		
Battery Model Number			102	247				
Inverter Model Numbers	5K Inverter: No	t Sold Separately		12K Inverter: 10248				
Smart Access Controller Model Number		10249						
Al+ Smart Switch Model Number		10250						
PACKAGES								
Total Energy Capacity Included	1 Battery (5.12 kWh)	2 Batteries (10.24 kWh)	2 Batteries (10.24 kWh)	3 Batteries (15.36 kWh)	4 Batteries (20.48 kWh)	168 Batteries (860.16 kWh max)		
Usable Energy Capacity Included	1 Battery (5.12 kWh)	2 Batteries (10.24 kWh)	2 Batteries (10.24 kWh)	3 Batteries (15.36 kWh)	4 Batteries (20.48 kWh)	168 Batteries (860.16 kWh max)		
Battery Expandability *add additional batteries to any package, up to 14 Batteries per 12K Inverter		Up to 14 Batteries in Parallel (71.68 kWh)						
Inverter Quantity Included	1 5K Inverter	1 5K Inverter	1 12K Inverter	1 12K Inverter	1 12K Inverter	Stack 1-12 12K Inverters per Home		
Total Smart Access Controllers Included	Optional Sr	Optional Smart Access Controller Add-on			1 Smart Access Controller (12 Breakers)	Purchase as Many as Needed		
Total Al+ Smart Switch Included		Optional AI+ Smart Switch Add-on 1 A				art Switch		
POWER / OUTPUT								
Nominal Cont. AC Power On Grid @240v	5,000	5,000W 20.8A		9,000 37.5A				
Nominal Cont. AC Power Off Grid @240v	5,000	5,000W 20.8A		9,000 37.5A				
On Grid Pass Through @240v			15,120W 63A			15,120W 63A<		
Surge AC Power @240v		16,000VA (10 sec)						
Nominal AC Voltage / Range		120/240 @ 60/50Hz						
Max. Charging Current (A)	12	120A		185A				
Max Discharging Current (A)	12	120A		185A				
Response Time (Grid-tied to Off-grid)		4ms						
AC/DC Coupling			Y	es				
Number of MPPT's / Strings			2 / 4			4-24<		
Solar Ready & Generator Ready			Y	es				
Inverter Supplies String Inverter/Micro Inverter		Ye	s, to Keep Solar Li	ve in a Power Out	age			
Max. DC PV Input Power (W)	650	00W		13,0	00W			
Max. DC Input Voltage (V)			50	OOV				

5



POWER / OUTPUT continued	AI+ 30A	AI+ 30A PLUS	AI+ 50A	AI+ 70A SMART ACCESS	AI+ 200A SMART ACCESS	AI+ CUSTOM WHOLE HOME		
MPPT Range (V)			150-4	425V				
Start-up Voltage (V)			12	5V				
Max. AC Couple Input (Micro/String Inverter)	9600W							
Support	Islanding, Grid Sell, Self Consumption, Prioritized Charging from Renewables, Grid Support - Zero Expor ESS PCS Operation Modes (Import Only, Export Only), Backup Loads Disconnect, Inverter Bypass Switc							
STORZ POWER BATTERY								
Battery Chemistry			Lithium-Iron Ph	nosphate (LFP)				
Round Trip Efficiency DC-DC	98%							
Depth of Discharge	100% (at 1C Rate at 77°F)							
Cycle Life	8,000 Cycles at 77°F)							
Battery Voltage Range (V)	44V-56V							
Battery Terminal Lugs	Parallel Connection Required							
Battery Protection Function	Over-charge, Over-discharge, Over-current, Short Circuit, Temperature							
SMART ACCESS Smart Access Controller AC Voltage	Optional Sm	nart Access Contr	oller Add-on		120/240V			
Breaker Quantity per Smart Access Controller		12 Breakers	s: six 30 amp breal	kers and six 60 a	mp breakers			
Smart Access Controllers > Control as many electrical panels as needed with Smart Access technology	Add additional Smart Access Controllers to any package, max amount is unlimited							
Flexibility > Choose where you want to use energy	Optional Sm	nart Access Contr	oller Add-on	Yes	Yes	Yes		
Energy App Control > Turn appliances off & on manually or with a schedule	Optional Sm	Optional Smart Access Controller Add-on Yes		Yes	Yes	Yes		
Storz Power Al+ Wireless > Control multiple sub-panels	Optional Smart Access Controller Add-on Yes				Yes	Yes		
AI+ SMART SWITCH								
Al+ Smart Switch Equals Automatic Transfer Switch					A 000000 b	2004 man-1 -ff		
*generator based transfer switches will not work in place of a AI+ Smart Switch	Optional AI+ Smart Switch Add-on			Access up to a 200A panel off grid with no interruptions				
INSTALLATION SPECIFICATIONS								
Mounting or Installation Type	Battery: Floor Mount, Inverter: Wall Mount, Smart Access: Wall Mount, Al+ Smart Switch: Wall Mount							
	Battery: Indoor, Inverter: NEMA 3R, Smart Access: Indoor, AI+ Smart Switch: NEMA 3R							



INSTALLATION SPECIFICATIONS continued	AI+ 30A	AI+ 30A PLUS	AI+ 50A	AI+ 70A SMART ACCESS	AI+ 200A SMART ACCESS	AI+ CUSTOM WHOLE HOME		
Battery Max. Ambient Operating Temperature Range			14°F to 113°F /	-10°C to 45°C				
Battery Recommended Operating Temperature Range	77°F to 87°F / 25°C to 30.6°C							
Battery Operating Humidity (RH)	75%							
Battery Storage Conditions	<86°F, State of Charge 20%-60%							
Inverter Ambient Operating Temperature Range		-13°F - 131°F	, >113°F derating /	′ -25°C - 55°C, >4	5°C derating			
AI+ Smart Switch Recommended Operating Temp. Range	Optional AI+ Smart Switch Add-on -4°F - 158°F / -20°							
AI+ Smart Switch Operating Humidity (RH)		Optional AI+ Sma	art Switch Add-on		5-95% non-condensing			
Cooling	Battery/Smart Access/AI+ Smart Switch: Natural Convection - No Fan Inverter: Active Fan Cooling							
Maximum Installation Altitude (Ft.)			No I	₋imit				
COMPATIBILITY		,	note: charge/disc	harge rate may b	e reduced at ten	nperature extremes		
Battery Compatibility	Most 48V PV Inverter Manufacturers & Grid-tied PV Systems							
Communication from Battery to Inverter	Double RS485							
Battery Supported Communication Interfaces	CANbus, MODbus							
Monitoring Included	Yes							
SIZE & WEIGHT								
Battery Dimensions / Weight 1 Battery: 17" x 17" x 8.75" / 124 lb.	24"x22"x27" 178 lb.	24"x22"x27" 302 lb.	24"x22"x27" 302 lb.	23.63"x23.63"x43" 474 lb.	23.63"x23.63"x43 598 lb.	" Custom		
Inverter Dimensions / Weight			30" x 18.3" x	< 10" / 78 lb.				
Smart Access Controller	Optional S	mart Access Contr	oller Add-on	17.	.5" x 17.5" x 4" / 27 lb.			
Al+ Smart Switch	Optional Al+ Smart Switch Add-on				24.1" x 13.4" x 7" / 18 lb.			
WARRANTY								
Battery	Full Repair/Rep	lace: 15 Year Perfo	rmance Warranty	(or 8,000 Cycles	at 77°F), 10 Year	Product Warranty		
Inverter					nverter dard Warranty			
Smart Access Controller	Optional Smart Access Controller Add-on				Year Limited Warranty			
Al+ Smart Switch		Optional AI+ Sma	art Switch Add-on		5 Year Lim	ited Warranty		
COMPLIANCE STANDARDS								
Battery Safety / Certifications	UL 1642, UN 38.3, ANSI/CAN/UL-1973, UL 9540, CA-SGIP, CEC, OGPe							
Inverter Safety / Certifications	NEC 690.4B, NEC 705.4/6, UL1741-2010/2018, IEEE1547a-2003/2014, FCC 15 class B, UL1741SA, CA Rule 21, HECO Rule 14H, NEC 240.15, NEC 690.5, NEC 690.5, NEC 690.12, NEC 690.11/UL 1699B, PV Input Lightning Protection, AC Input/Output 63A Breakers, Battery Breaker/Disconnect, PREPA							
Smart Access Controller Safety / Certifications	Optional Si				UL 916/61010			





COMPLIANCE STANDARDS continued	AI+ 30A	AI+ 30A PLUS	AI+ 50A	AI+ 70A SMART ACCESS	AI+ 200A SMART ACCESS	AI+ CUSTOM WHOLE HOME	
Al+ Smart Switch Safety / Certifications		Optional AI+ Smart Switch Add-on				UL 1008, UL 508, CSA certified, file #LR58301, NFPA 70, NFPA 110, IEEE Standard 446, IC10-1993, ANSI C37.90.1 (IEEE472), EN61000-4-5, EN61000-4-4, CISPR 11, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-6, IEC 61000-4-5, IEC 61000-4-11	
Grid Connection	Worldwide Compatibility						
Emissions	No Emissions / Clean Energy						
ETL Listed / Intertek	Tested and Passed						